


APPROXIMATION OF CONSTRUCTION




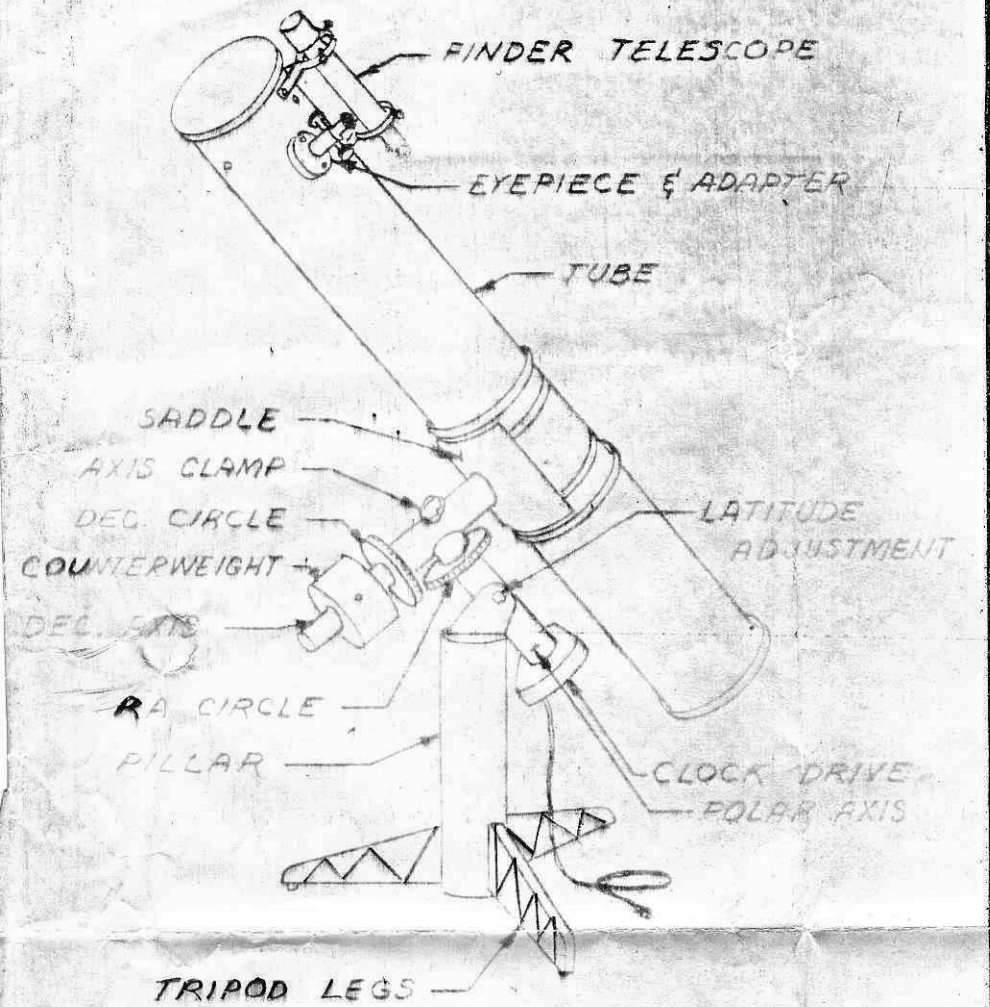


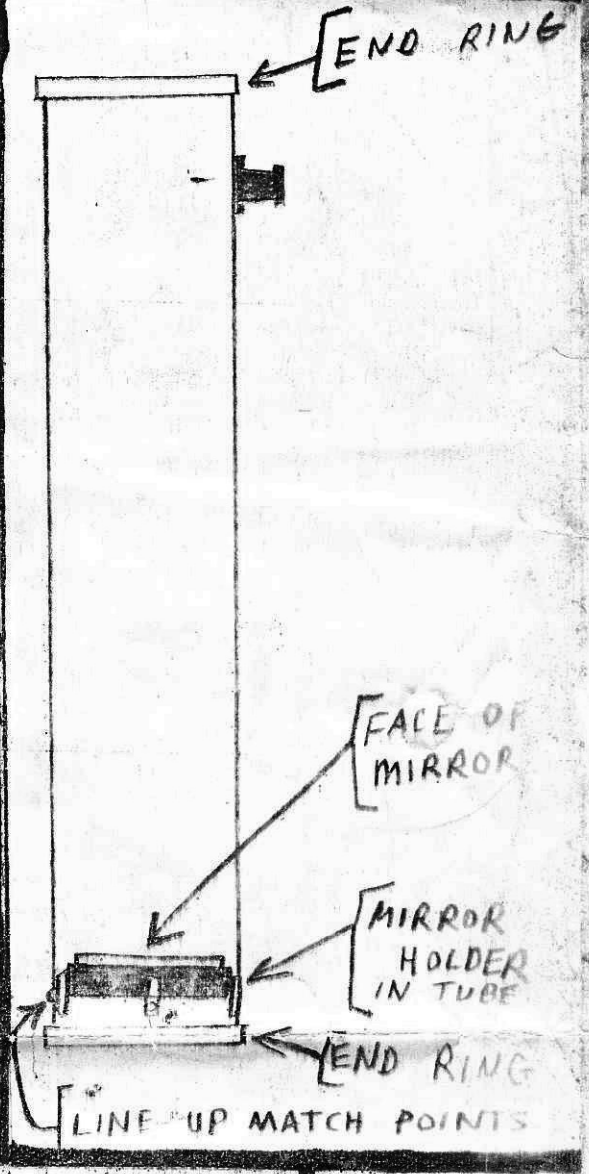


PLACE WEIGHT OR WEIGHTS TO BOTTOM OF TAPE LEVEL

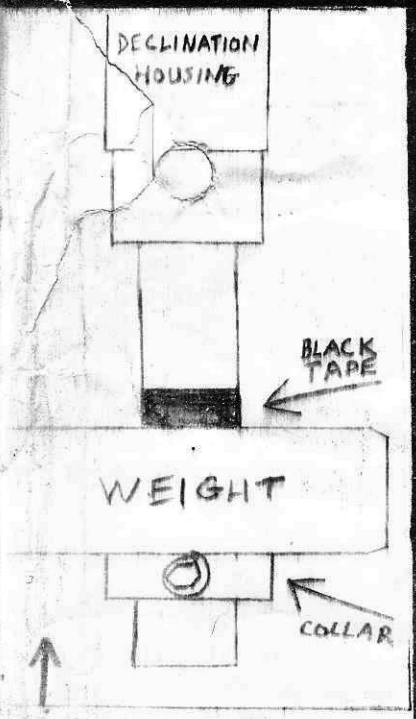



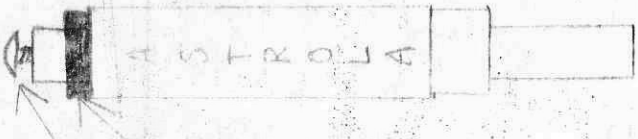

REMOVE COLLAR AND REMOVE BOLT BEFORE PLACING SADDLE IN PLACE

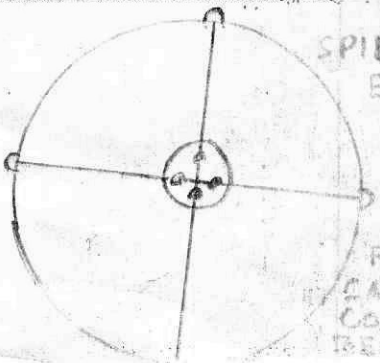

RING ASSEMBLY INSTRUC

1. PLACE RING ASSEMBLY AT BALANCE POINT OF TUBE
2. REMOVE EACH ROUNDHEAD SCREW
3. DRILL HOLE THROUGH AND TAP HOLE
4. SCREW EACH ROUNDHEAD SCREW INTO PLACE